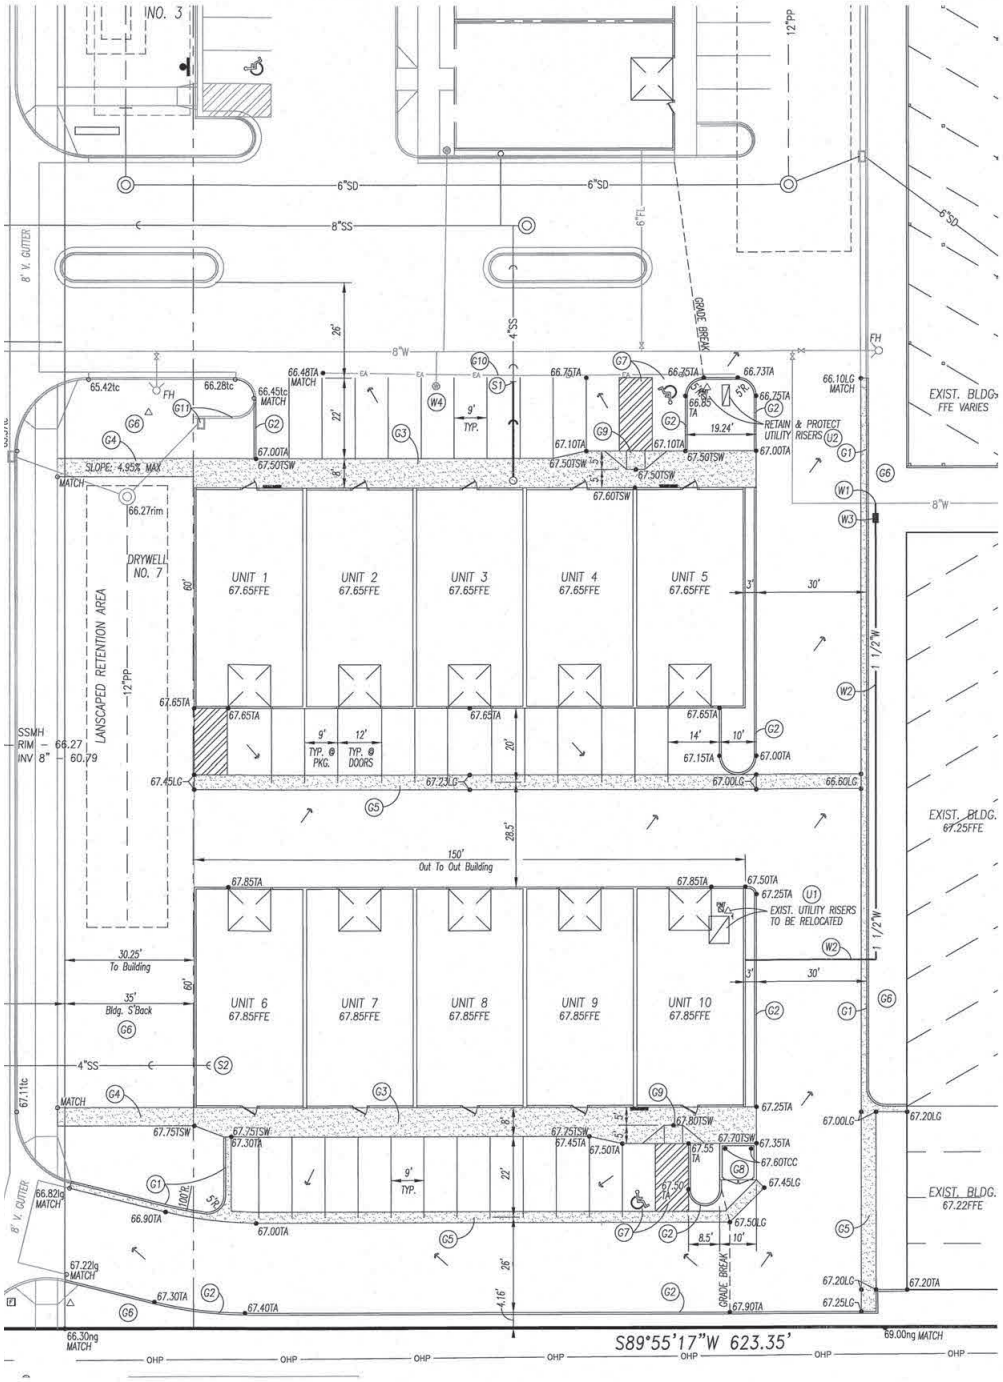

NO. 3
6"SD
8"SS
8" V. GUTTER
GRADE BREAK
4"SS
8"W
12"PP
EXIST. BLDG.
FFE VARIES
RETAIN & PROTECT UTILITY RISERS
SLOPE: 4.95% MAX
DRYWELL NO. 7
LANSCAPED RETENTION AREA
SSMH
RIM - 66.27
INV 8" - 60.79
UNIT 1
67.65FFE
UNIT 2
67.65FFE
UNIT 3
67.65FFE
UNIT 4
67.65FFE
UNIT 5
67.65FFE
TYP. @ PKG.
TYP. @ DOORS
150'
Out To Out Building
EXIST. UTILITY RISERS TO BE RELOCATED
EXIST. BLDG.
67.25FFE
30.25'
To Building
35'
Bldg. S'Back
UNIT 6
67.85FFE
UNIT 7
67.85FFE
UNIT 8
67.85FFE
UNIT 9
67.85FFE
UNIT 10
67.85FFE
EXIST. BLDG.
67.22FFE
S89°55'17"W 623.35'